

RFT6

60cm T-Shape Canopy Rangehood

Euromaid



FEATURES

Finish	Stainless Steel
Extraction	1000m ³ /h
No. of Speeds	3
Control Type	Touch with Red LED
Lighting	2 x LED
Filters	2 x Baffle

ACCESSORIES

Carbon Filter	CF260 (Optional)
Recirculating Kit	IA150BRK (Optional)
Flue Extension	IAFXSE1 (Optional)




Scan for more info

RFT6

60cm T-Shape Canopy Rangehood

Euromaid

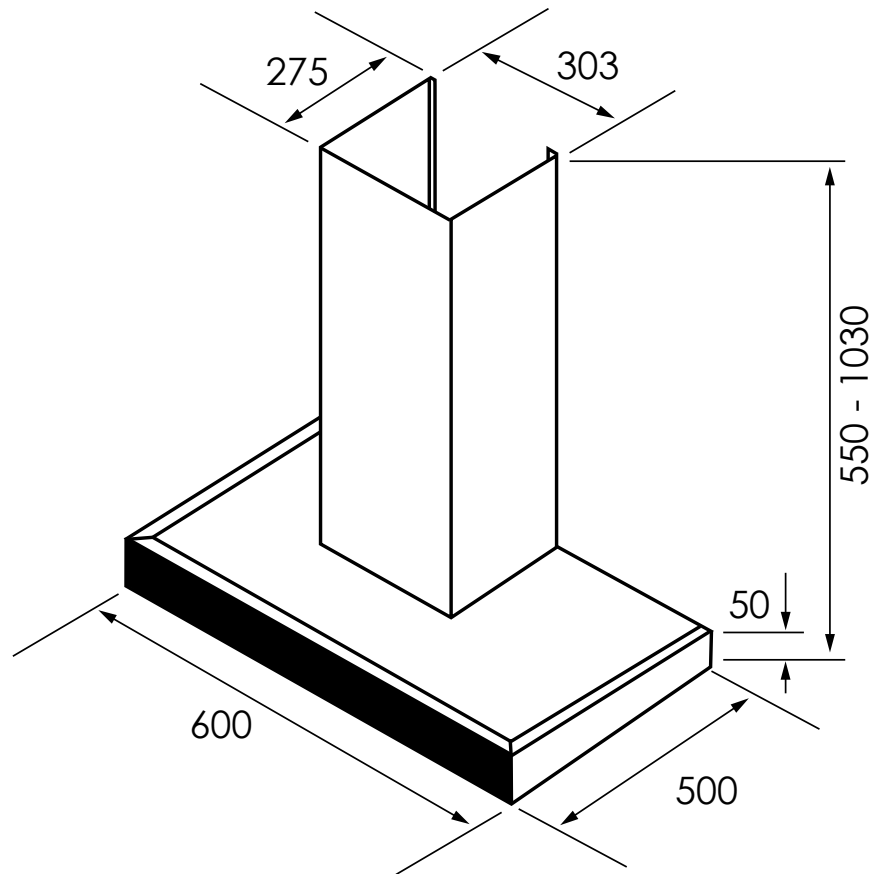

SPECIFICATIONS

Electrical Connection	10A Plug
Power	220 - 240V ~ / 50Hz
Motor Wattage	190w
LED Wattage	2 x 1.5w
Power Cord Length	1.5m

DIMENSIONS (W x H x D)

Carton (mm)	660 x 555 x 405
Product (mm)	600 x 550 - 1030 x 500
Recommended Clearance (mm)	650 - 750*
Duct Diameter (mm)	150

WEIGHT

Gross (kg)	16
Net (kg)	14.5

WARRANTY

Product	2 Years Parts and Labour
---------	--------------------------

*Install the Rangehood in accordance with the manufacturer's instructions. For optimum performance, we recommend that all Rangehood clearances be a minimum of 650mm to a maximum of 750mm between the top of the cooking surface to the underside of the Rangehood. The distance may be reduced to 600mm to align with AS/NZS 5601.

VERSION NO. 20220920

euromaid.com.au